

## TF1 Delta Filter 2" Usa Valve 2" 62227

- Optimum performance with magnetic and hydrocyclonic filtration for large volume, commercial systems
- Fast and easy to install close to the wall (with minimal pipe alterations necessary). Fits horizontal and vertical pipework in both flow directions
- Maximum working pressure of 16 bar (232 psi)
- Automatic Air Vent with Auto Shut-off Valve – 12 bar (174 psi)
- High grade, high temperature rated neodymium magnet
- 4 year warranty



Precision engineered, the Fernox TF1 Delta Filter is a high quality, nickel plated, brass inline system filter specifically designed to protect vital and expensive components in large volume and low temperature commercial heating and cooling systems. The TF1 Delta Filter has three methods of filtration: magnetic, hydrocyclonic and automatic or manual deaeration. It protects key components from magnetic and non-magnetic debris as well as removing trapped air from system water. It is easy to install, service and clean in situ, whilst the system is operational, and can be used in-line or on a bypass.


### Single Item

Height mm	270
Width mm	314
Depth mm	515
Weight kg	24.700
Barcode EAN	5014551622272

### Outer Carton


OCU Barcode	N/A
Transit Type	Euro 1200 x 800
Total units per transit layer	4
Layers per transit type	3
Total units per transit type	12

Graph

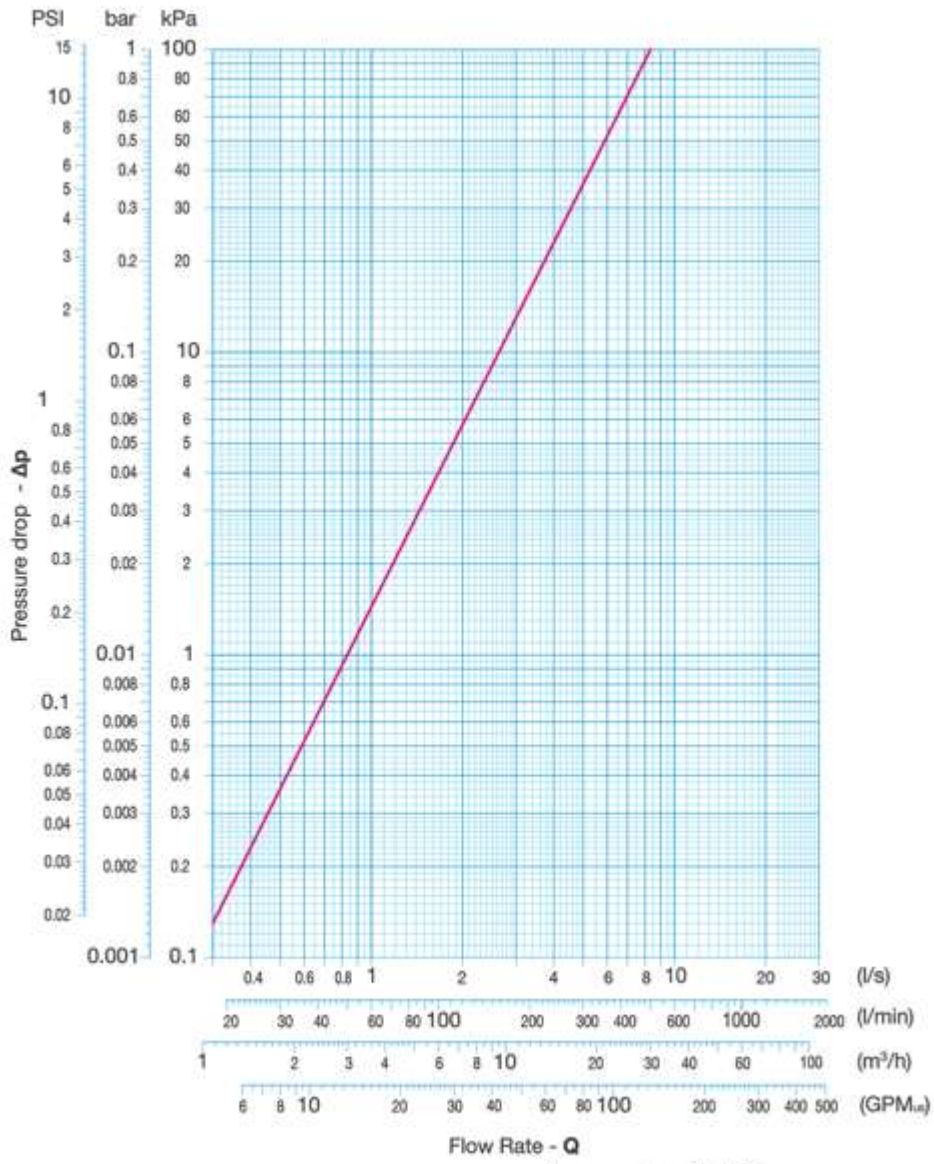


Pressure Loss Data Diagram


Dimensions Diagram

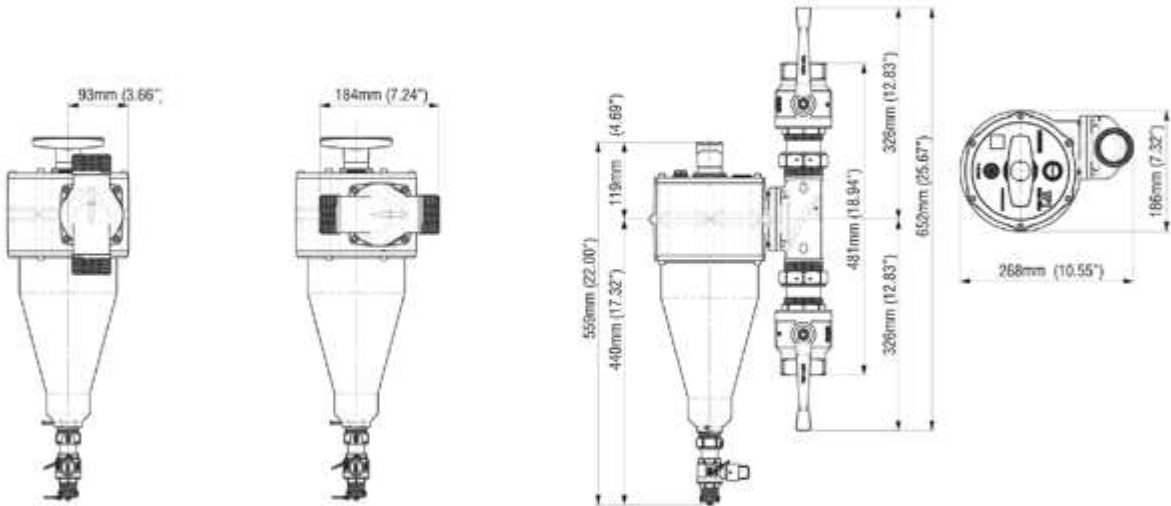


## Cleaning Diagram

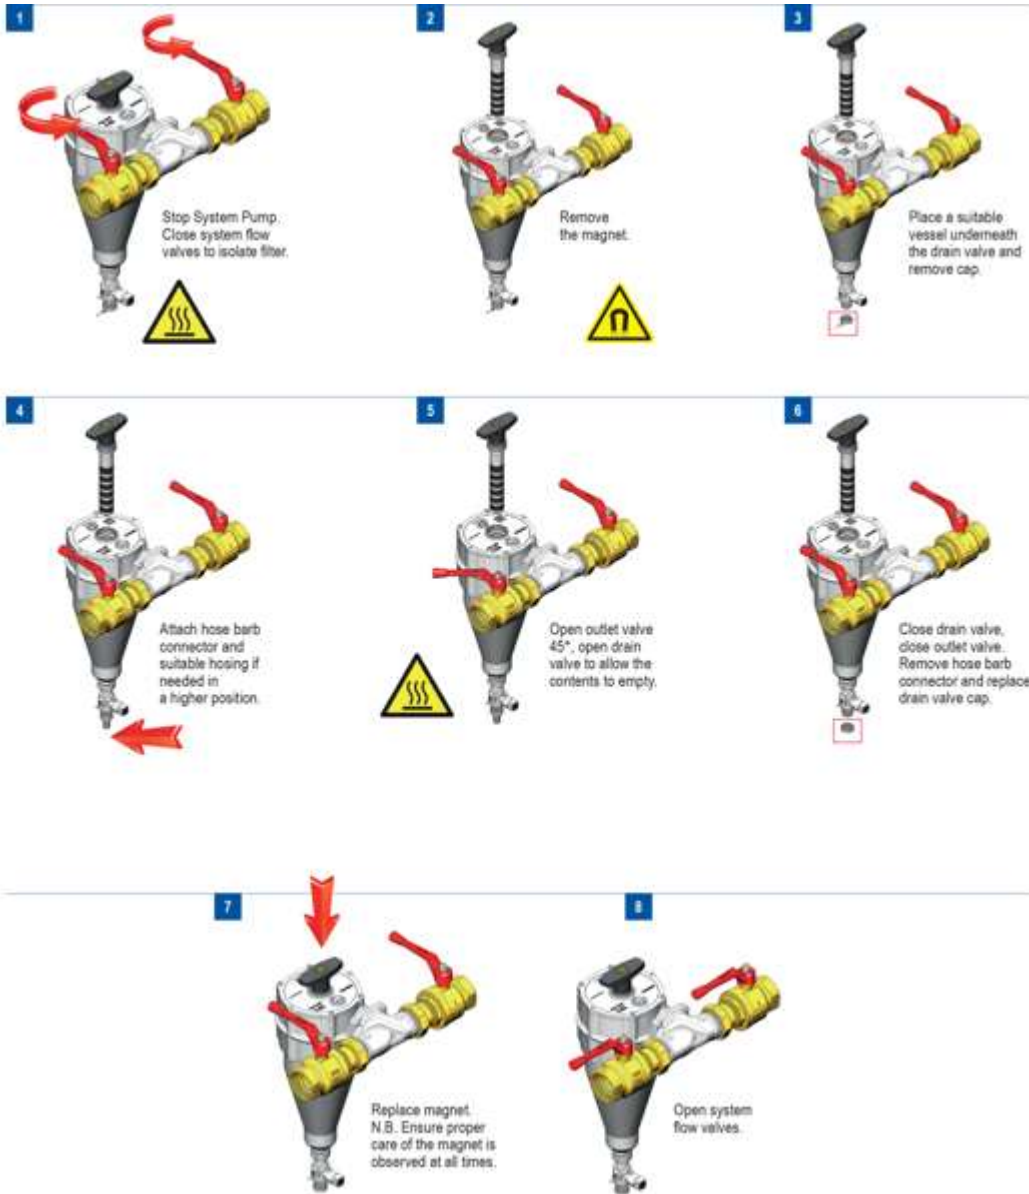

Fitting Diagram

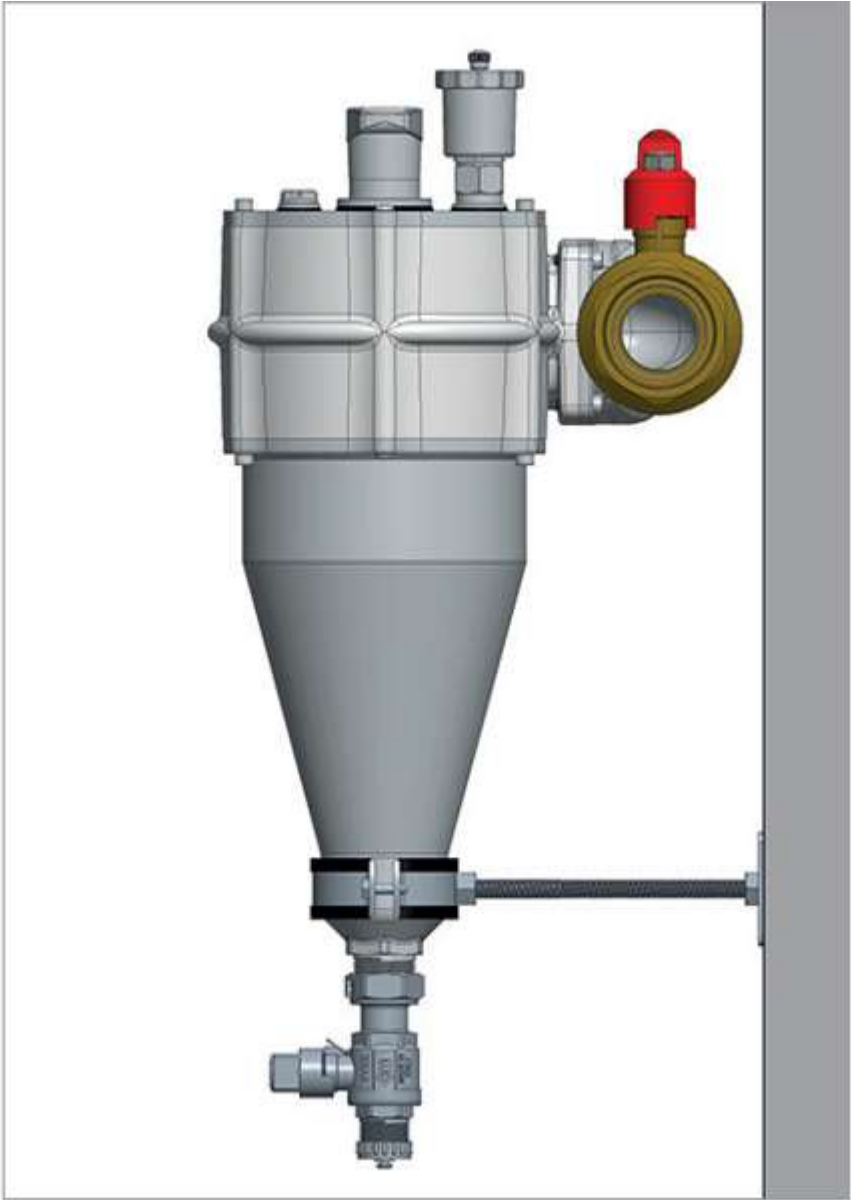

## Install Position

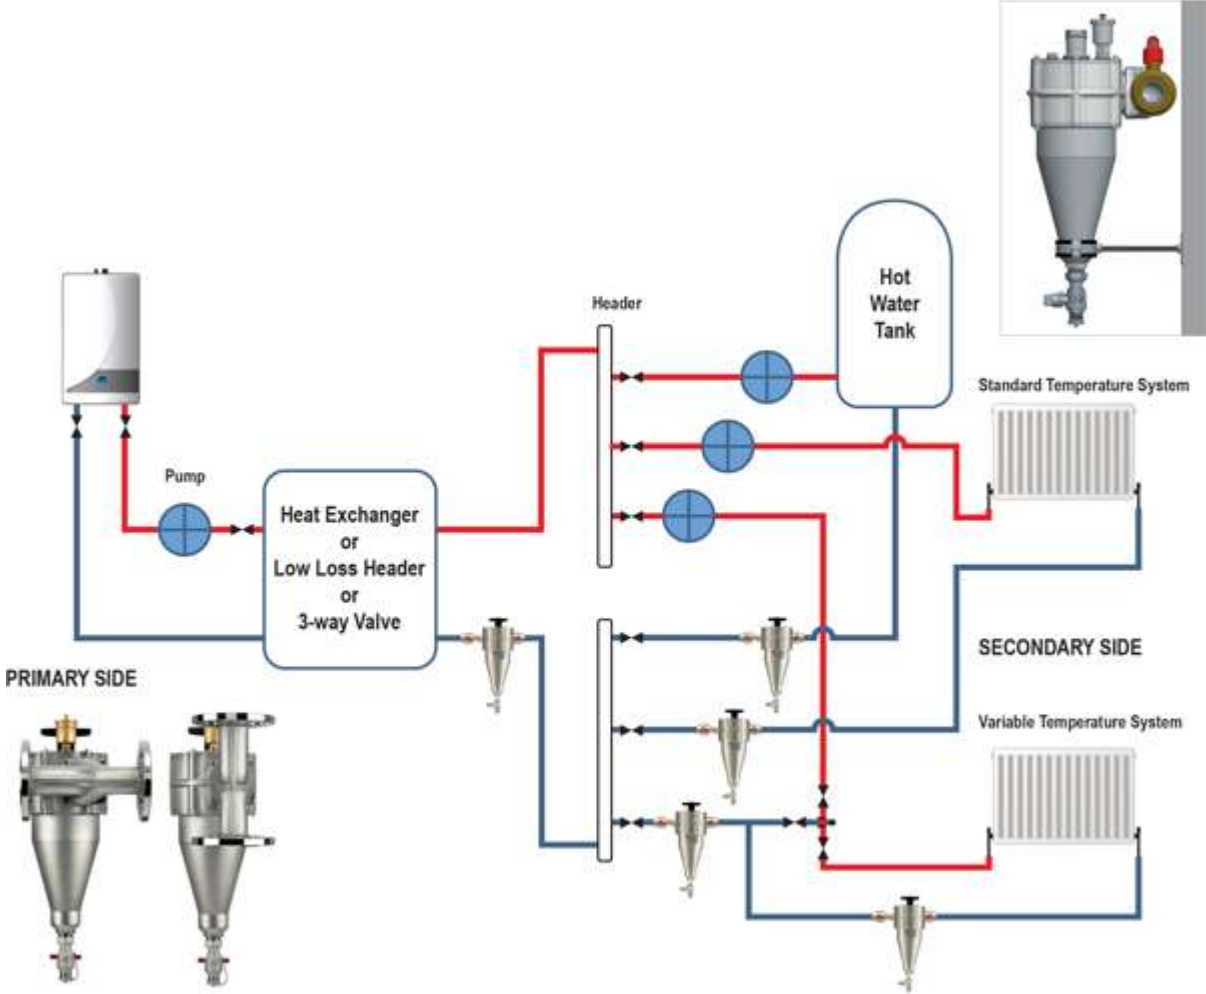

Last modification

21-04-2021 (d/m/y)