


FLOW CENTERS: PRESSURIZED SYSTEMS

Pressurized Operating Systems

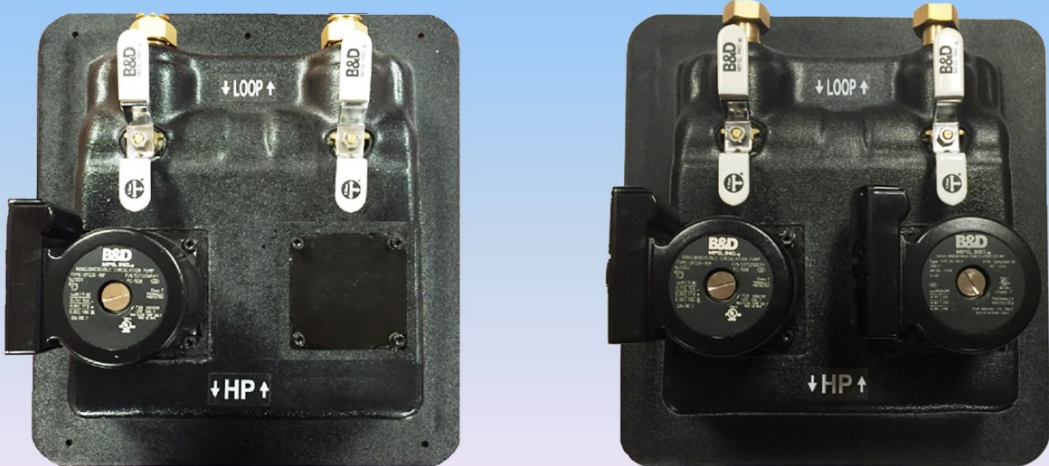

Features & Benefits

5 Year Limited Warranty - *Customer Assurance*

Mounts to Wall - *Fast Installation*

Foam Insulation - *Eliminates Condensation*

Single & Dual Pumps Options - *Gives Multiple Pump Options*

3-Way Ball Valve Design - *Durable Long Lasting*

Plastic Durable Cabinet Construction - *Long Life*

1" FPT Swivel Connectors on Inlet & Outlet - *Flexible Installation*

Part Number	# of Pumps	Voltage	Amps Grundfos (3 Speed)	HP (ea.)	Inlet/Outlet Size	Ht (in.)	Width (in.)	Dpth (in.)	Weight (lbs)
1-230POS-G	1	230	.90	1/6	1" Swivel (FPT)	12 1/2	12 1/2	8"	29
2-230POS-G	2	230	1.8	1/6	1" Swivel (FPT)	12 1/2	12 1/2	8"	37
1-230POS-M	1	230	1.8	1/6	1" Swivel (FPT)	12 1/2	12 1/2	8"	29
2-230POS-M	2	230	3.6	1/6	1" Swivel (FPT)	12 1/2	12 1/2	8"	37

Model Number Letter G=3-2699-3 Speed

M=26-116F (1.8 Amps per Pump)

See Pump Curve Section in Back of Catalog for Pump Performance Data



ALL THE "PUMP" YOU NEED AND MORE

1-866-646-6724
712-652-3424
www.bdmfginc.com